
## Isokern IBV 46" Fireplace




Project Name: \_\_\_\_\_ Location: \_\_\_\_

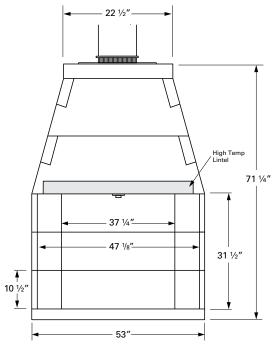


Uses 10" DuraLock-DuraVent Type B Gas Vent Chimney.

10 3/4"
25 1/4"
Flue Outlet



**Top View** 



Side View

**Front View** 

**Plan View** 

FIREPLACE OPTIONS

Hearth Height: \_\_\_\_\_\_
Opening Height: \_\_\_\_\_\_

Brick Type: \_\_\_\_\_


Brick Pattern: \_\_\_\_\_

Chimney Type: \_\_\_\_\_

Decorative Termination:

Notes:		 	

Framing dimensions maintain 1 1/2" clearance to combustibles. This is the standard framing height for the model shown. Refer to product manual for other framing height openings and further installation instructions.

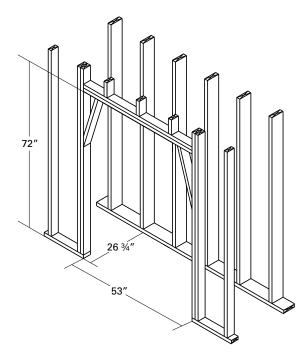

MINIMUM FRAMING DIMENSIONS

The total weight for the IBV 46" fireplace is approximately 1700 lbs. This dry weight includes fireplace pumice components only, additional weight from mortar, damper, firebrick and chimney not included.